






















































Lens		35mm Camera Equivalent Focal Length	AF Actuator	O.I.S.	HD Video Support	Lens Construction Elements-Groups	Angle of View	Number of Blades	Minimum Aperture	Closest Focusing Distance (m)	Maximum Image Magnification (35mm camera equivalent)	Filter Size (mm)	Diameter (φ) x Length (mm)	Weight (g)	Standard Accessories	
		H-X015E (-K, -S) LEICA DG SUMMILUX 15mm / F1.7 ASPH. 	30mm	Stepping Motor	-	●	9-7	72°	7 (Circular aperture diaphragm)	16	0.2	0.1x (0.2x)	46	φ 57.5 x 36	115	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-X025E LEICA DG SUMMILUX 25mm / F1.4 ASPH. 	50mm	Stepping Motor	-	-	9-7	47°	7 (Circular aperture diaphragm)	16	0.3	0.11x (0.22x)	46	φ 63 x 54.5	200	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-NS043E LEICA DG NOCTICRON 42.5mm / F1.2 ASPH. / POWER O.I.S. 	85mm	Stepping Motor	POWER O.I.S.	●	14-11	29°	9 (Circular aperture diaphragm)	16	0.5	0.1x (0.2x)	67	φ 74 x 76.8	425	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-ES045E LEICA DG MACRO-ELMARIT 45mm / F2.8 ASPH. / MEGA O.I.S. 	90mm	Stepping Motor	MEGA O.I.S.	-	14-10	27°	7 (Circular aperture diaphragm)	22	0.15 (FULL), 0.5 (LIMIT)	1.0x (2.0x)	46	φ 63 x 62.5	225	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-HS12035E LUMIX G X VARIO 12-35mm / F2.8 ASPH. / POWER O.I.S. 	24-70mm	Stepping Motor	POWER O.I.S.	●	14-9	84°-34°	7 (Circular aperture diaphragm)	22	0.25	0.17x (0.34x)	58	φ 67.6 x 73.8	305	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-PS14042E (-K, -S) LUMIX G X VARIO PZ 14-42mm / F3.5-5.6 ASPH. / POWER O.I.S. 	28-84mm	Stepping Motor	POWER O.I.S.	●	9-8	75°-29°	7 (Circular aperture diaphragm)	22	0.2, 0.3 *3	0.17x (0.34x)	37	φ 61 x 26.8*6	95	Lens cap, Lens rear cap, Lens storage bag
		H-HS35100E LUMIX G X VARIO 35-100mm / F2.8 / POWER O.I.S. 	70-200mm	Stepping Motor	POWER O.I.S.	●	18-13	34°-12°	7 (Circular aperture diaphragm)	22	0.85	0.1x (0.2x)	58	φ 67.4 x 99.9	360	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-PS45175E (-K, -S) LUMIX G X VARIO PZ 45-175mm / F4.0-5.6 ASPH. / POWER O.I.S. 	90-350mm	Stepping Motor	POWER O.I.S.	●	14-10	27°-7.1°	7 (Circular aperture diaphragm)	22	0.9	0.2x (0.4x)	46	φ 61.6 x 90.0	210	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-F008E LUMIX G FISHEYE 8mm / F3.5	16mm	Stepping Motor	-	●	10-9	180°	7 (Circular aperture diaphragm)	22	0.1	0.20x (0.40x)	*1	φ 60.7 x 51.7	165	Lens cap, Lens rear cap, Lens storage bag
		H-H014AE (-K, -S) LUMIX G 14mm / F2.5 ASPH.	28mm	Stepping Motor	-	●	6-5	75°	7 (Circular aperture diaphragm)	22	0.18	0.10x (0.20x)	46	φ 55.5 x 20.5	55	Lens cap, Lens rear cap,
		H-H020AE (-K, -S) LUMIX G 20mm / F1.7 II ASPH.	40mm	Stepping Motor	-	-	7-5	57°	7 (Circular aperture diaphragm)	16	0.2	0.13x (0.25x)	46	φ 63 x 25.5	87	Lens cap, Lens rear cap, Lens storage bag
		H-F007014E LUMIX G VARIO 7-14mm / F4.0 ASPH.	14-28mm	Stepping Motor	-	●	16-12	114°- 75°	7 (Circular aperture diaphragm)	22	0.25	0.08x (0.15x)	-	φ 70 x 83.1	300	Lens cap, Lens rear cap, Lens storage bag
		H-FS12032E (-K, -S) LUMIX G VARIO 12-32mm / F3.5-5.6 ASPH. / MEGA O.I.S.	24-64mm	Stepping Motor	MEGA O.I.S.	●	8-7	84°- 37°	7 (Circular aperture diaphragm)	22	0.2, 0.3 *3	0.13x (0.26x)	37	φ 55.5 x 24	70	Lens cap, Lens rear cap
		H-FS1442AE (-K, -S) LUMIX G VARIO 14-42mm / F3.5-5.6 II ASPH. / MEGA O.I.S.	28-84mm	Stepping Motor	MEGA O.I.S.	●	9-8	75°- 29°	7 (Circular aperture diaphragm)	22	0.2, 0.3 *4	0.17x (0.34x)	46	φ 56 x 49	110	Lens cap, Lens hood, Lens rear cap
		H-FS014042E LUMIX G VARIO 14-42mm / F3.5-5.6 ASPH. / MEGA O.I.S.	28-84mm	Stepping Motor	MEGA O.I.S.	●	12-9	75°- 29°	7 (Circular aperture diaphragm)	22	0.3	0.16x (0.32x)	52	φ 60.6 x 63.6	165	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-FS014045E LUMIX G VARIO 14-45mm / F3.5-5.6 ASPH. / MEGA O.I.S.	28-90mm	Stepping Motor	MEGA O.I.S.	●	12-9	75°- 27°	7 (Circular aperture diaphragm)	22	0.3	0.17x (0.34x)	52	φ 60 x 60	195	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-FS14140E (-K, -S) LUMIX G VARIO 14-140mm / F3.5-5.6 ASPH. / POWER O.I.S.	28-280mm	Stepping Motor	POWER O.I.S.	●	14-12	75°- 8.8°	7 (Circular aperture diaphragm)	22	0.3, 0.5 *5	0.25x (0.5x)	58	φ 67 x 75	265	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-FS35100E (-K, -S) LUMIX G VARIO 35-100mm / F4.0-5.6 ASPH. / MEGA O.I.S.	70-200mm	Stepping Motor	MEGA O.I.S.	●	12-9	34°- 12°	7 (Circular aperture diaphragm)	22	0.9	0.11x (0.22x)	46	φ 55 x 50	135	Lens cap, Lens hood, Lens rear cap
		H-FS45150E (-K, -S) LUMIX G VARIO 45-150mm / F4.0-5.6 ASPH. / MEGA O.I.S.	90-300mm	Stepping Motor	MEGA O.I.S.	●	12-9	27°- 8.2°	7 (Circular aperture diaphragm)	22	0.9	0.17x (0.35x)	52	φ 62 x 73	200	Lens cap, Lens hood, Lens rear cap
		H-FS045200E LUMIX G VARIO 45-200mm / F4.0-5.6 / MEGA O.I.S.	90-400mm	Stepping Motor	MEGA O.I.S.	●	16-13	27°- 6.2°	7 (Circular aperture diaphragm)	22	1.0	0.19x (0.38x)	52	φ 70 x 100	380	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-FS100300E LUMIX G VARIO 100-300mm / F4.0-5.6 / MEGA O.I.S.	200-600mm	Stepping Motor	MEGA O.I.S.	●	17-12	12°- 4.1°	7 (Circular aperture diaphragm)	22	1.5	0.21x (0.42x)	67	φ 73.6 x 126	520	Lens cap, Lens hood, Lens rear cap, Lens storage bag
		H-FT012E LUMIX G 12.5mm / F12 	65mm*2	-	-	-	4-3 x2	37°*2	-	-	0.6	0.02x (0.1x*2)	-	φ 57.0 x 20.5	45	Lens cap, Lens rear cap, Lens storage bag

*We recommend that you update the firmware to enjoy a more comfortable shooting experience. •The compression level of product photographs shown in this catalog varies. Check the above table for actual sizes. *1 Front: Mounting not possible, Rear: Sheet filter holder 22 mm/0.86 in x 22 mm/0.86 in *2 When setting the aspect ratio at 16:9 with the DMC-GH2 *3 Condition: 0.2 m/0.66 ft in 12mm-20mm, 0.3 m/0.98 ft in 21mm-32mm *4 Condition: 0.2 m/0.66 ft in 14mm-20mm, 0.3 m/0.98 ft in 21mm-42mm *5 Condition: 0.3 m/0.98 ft in 14mm-21mm, 0.5 m/1.64 ft in 22mm-140mm *6 When the lens is retracted. •Four Thirds™, Micro Four Thirds™ and the Four Thirds and Micro Four Thirds logo mark are trademarks or registered trademarks of Olympus Imaging Corporation, in Japan, the United States, the European Union and other countries. Specifications are subject to change without notice. Publish Date: November 2014



*Figures in parentheses are 35mm camera equivalent values.

H-F007014E
7-14mm



Small, Lightweight Ultra-Wide Angle Zoom Lens
Small and lightweight, this ultra-wide-angle lens lets you capture dynamic landscapes with lifelike depth and emphasized perspective. Also useful indoors or in cramped spaces as the wide-angle lens fits more in the shot.

Best for landscapes and architectural photography



H-HS12035E
12-35mm

POWER OIS



High Performance, High Speed F2.8 Standard Zoom Lens
High performance lens with great versatility covering wide, standard and medium telephoto. Fast F2.8 lens enables shallow depth of field and impressive low light performance. Splash & dustproof construction.

Best for everyday use, special events, landscapes



H-HS35100E
35-100mm

POWER OIS



High Performance, High Speed F2.8 Zoom Lens
Versatile premium zoom lens with internal zoom design. Fast F2.8 lens softly blurs background in portrait shots or delivers high shutter speeds to capture fast moving subjects. Splash & dustproof construction.

Best for portraits, everyday use, sports



H-X015E
15mm

LEICA DG LENS



Leica F1.7 Compact Lens Perfect For Everyday
With a premium Leica design and compact size, this lens is a perfect match for the Lumix GM1. It has aperture ring for easy adjustment of exposure and depth of field. Fast F1.7 creates beautiful bokeh.

Best for street photography, everyday use, landscapes



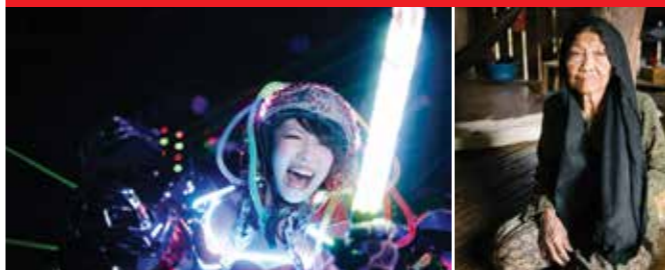
H-X025E
25mm

LEICA DG LENS



Stunning Shallow Focus with Ultra-Fast F1.4 Leica Lens
High speed F1.4 lens gives incredible shallow depth of field. Also perfect for low light situations such as shooting indoors or at night. Manufactured to Leica's stringent standards for the highest quality results.

Best for indoor, night, street photography, environmental portraits



H-NS043E
42.5mm

POWER OIS

LEICA DG LENS



Leica F1.2 Nocticon Medium Telephoto Lens
Manufactured to Leica's stringent optical standards, this lens has an ultra-fast F1.2 aperture, manual aperture ring and Optical Image Stabilisation. This lens is perfect for portraits and excels in low light situations.

Best for portraits



H-FS14140E
14-140mm

POWER OIS



Perfect All-in-one Travel Lens with 10x Optical Zoom
Incredibly versatile, this lens can capture a wide range of situations, from landscapes, to portraits and even distant subjects. And with its compact and lightweight construction it is the perfect all-in-one travel lens.

Best for travel, special events



H-FS45150E
45-150mm

POWER OIS



Compact and Lightweight Telephoto Lens
Capture natural-looking portraits in the medium telephoto range, or zoom all the way for dynamic action shots of wildlife or sports. Compact and lightweight, this lens is an ideal second lens for your everyday kit.

Best for portraits, special events, sports, wildlife



H-FS100300E
100-300mm

MEGA OIS



Ultra-Zoom Telephoto Lens
This ultra-zoom lens is perfect for capturing intense action sports or animals in the wild. Including Mega OIS it can correct for hand shake even when shooting handheld at full zoom.

Best for sports, wildlife, close-ups

